



RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

(14 circuits or less)

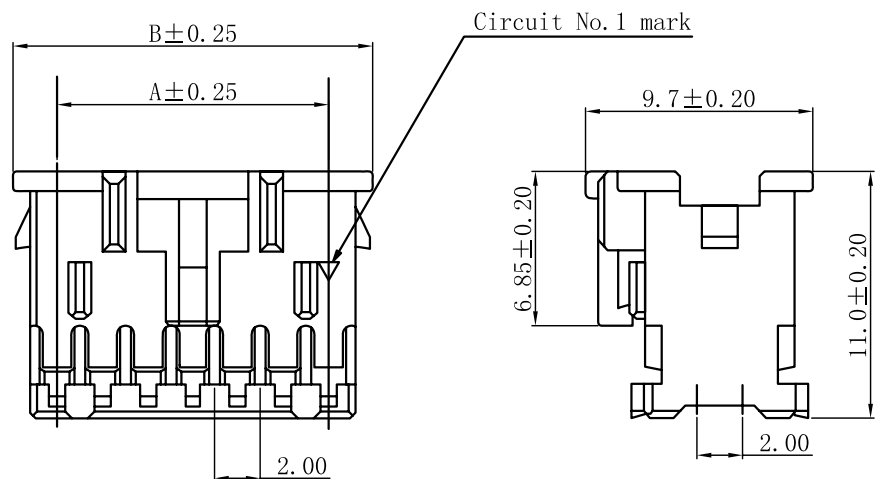

(16 circuits or more)

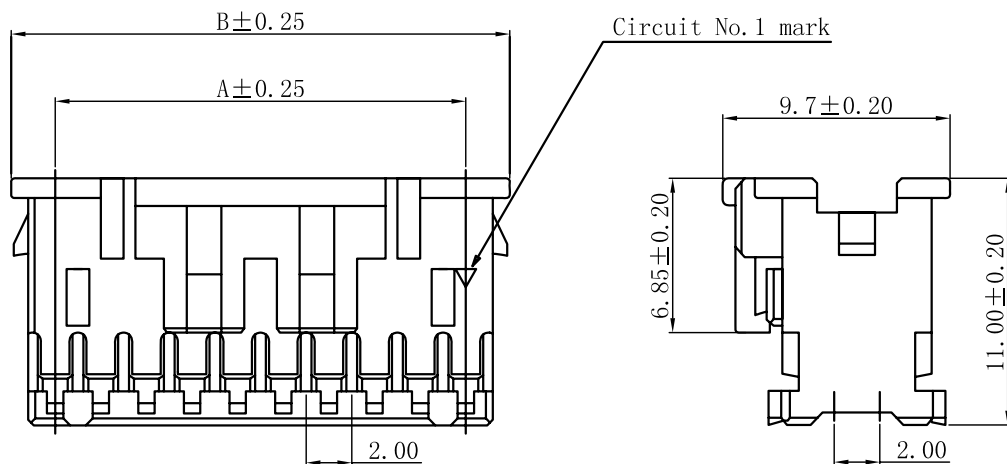


■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 20mΩ Max.

■ HOUSING

- Part No.: JVT2038HNO-XXL
- Poles: 04-32
- Material: PA66 UL94V-0
- Q' ty: 1000PCS/Bag

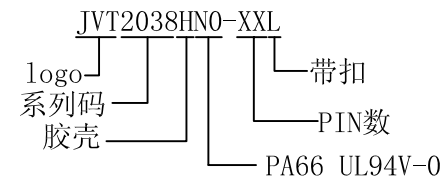

Poles	DIM		Poles	DIM	
	A	B		A	B
04	2.00	5.00	20	18.00	22.0
06	4.00	7.00	22	20.00	24.0
08	6.00	9.00	24	22.00	26.0
10	8.00	12.0	26	24.00	28.0
12	10.00	14.0	28	26.00	30.0
14	12.00	16.0	30	28.00	32.0
16	14.00	18.0	32	30.00	34.0
18	16.00	20.0			

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0	± 0.50
比例 (SCALE)	FIT	0.0	± 0.30
版本 (EDITION)	A	0.00	± 0.20
日期 (DATE)	2013 05 14	0.000	± 0.10

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	料号 (PART NO)	JVT2038HNO-XXL	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	031-2038-01	1/1	
核准 (APPROVE)		品名 (NAME)	PAD 2.0mm HOUSING		