



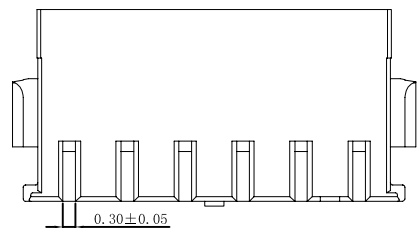







RoHS

REVISION DATE

ITEM	DESCRIPTION	DATE
	Issue	
A		

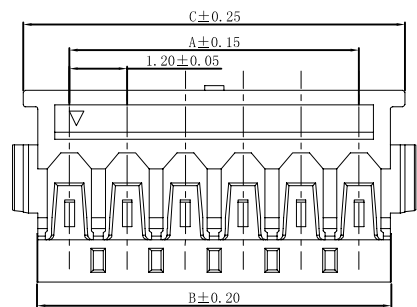


- SPECIFICATION**
- Voltage rating: 50V AC, DC
 - Current Rating: 2A, AC, DC
 - Withstand voltage: 500V AC/minute
 - Contact resistance: 20mΩ max
 - Insulation resistance: 100MΩ min
 - Temperature range: -25° C ~ +85° C
- HOUSING**
- Material: LCP/PA46 UL94V-0

JVT1224HXX-XXXX


logo
 系列码
 胶壳
 LP-LCP
 46-PA46

HF-无卤
 无-有卤
 PIN数


Poles	DIM(mm)		
	A	B	C
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70
11	12.00	13.40	13.90
12	13.20	14.60	15.10
13	14.40	15.80	16.30
14	15.60	17.00	17.50
15	16.80	18.20	18.70

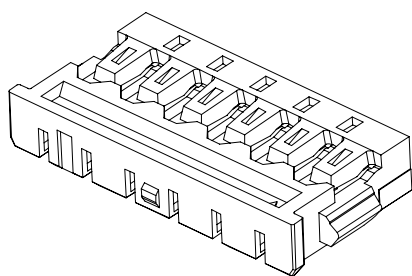

6-15PIN

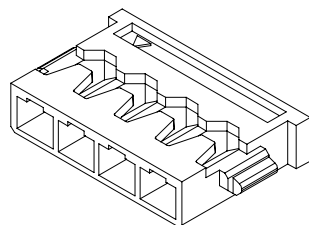

2-5PIN

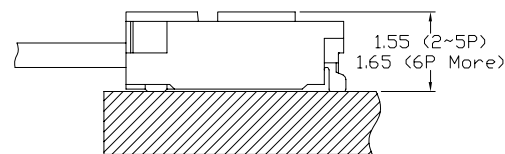

MATING VIEW

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.40
比例 (SCALE)	FIT	0.0 ±0.30
版本 (EDITION)	A	0.00 ±0.20
日期 (DATE)	2013 06 05	0.000 ±0.05

东莞市乔业电子有限公司
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品 号 (PART NO)	JVT1224HXX-XXXX	页 次 (PAGE)	
审核 (CHECKED)	CHEN	图 号 (DRAW NO)	054-1224-01	1/1	
核准 (APPROVE)		品 名 (NAME)	MLX 1.2mm HSG		