
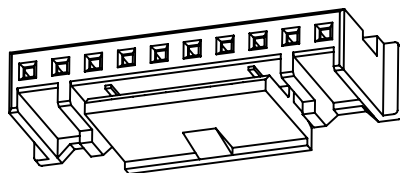


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	


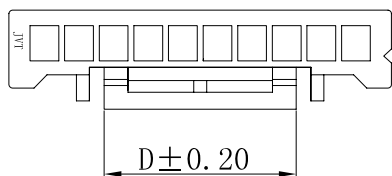


■ SPECIFICATIONS


- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 20mΩ Max.

■ HOUSING

- Part No.: JVT2032HN0-XXXXL
- Poles: 02-16
- Material: PA66 UL94V-0
- Q'ty: 1000PCS/Bag

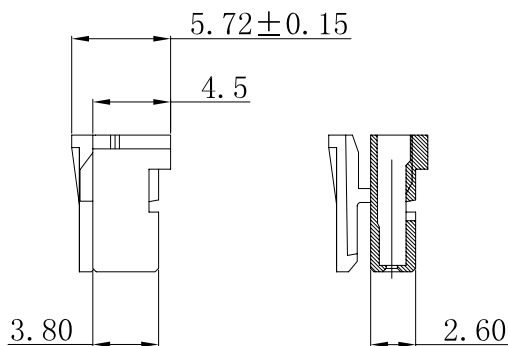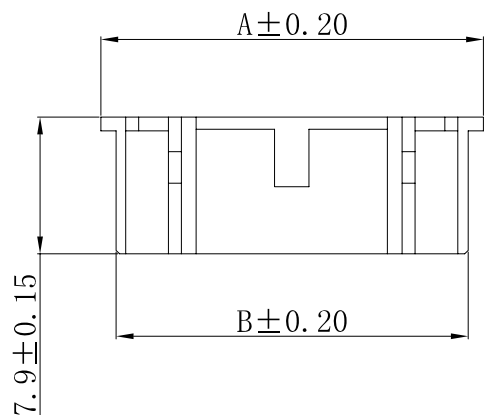

JVT2032HN0-XXXXL
 logo 系列码 胶壳 带卡扣 黑色: BK; 白色: 无
 PIN数 PA66 UL94V-0

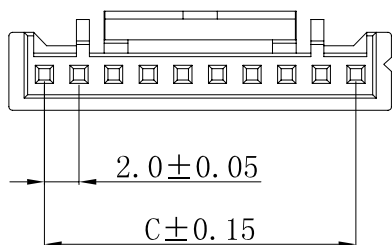

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2	6.10	4.34	2.00	2.60	10	22.10	20.34	18.00	11.1
3	8.10	6.34	4.00	3.45	11	24.10	22.34	20.00	
4	10.10	8.34	6.00	4.50	12	26.10	24.34	22.00	
5	12.10	10.34	8.00	4.5	13	28.10	26.34	24.00	
6	14.10	12.34	10.00		14	30.10	28.34	26.00	
7	16.10	14.34	12.00		15	32.10	30.34	28.00	
8	18.10	16.34	14.00		16	34.10	32.34	30.00	
9	20.10	18.34	16.00						

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0 ± 0.50	
比例 (SCALE)	FIT	0.0 ± 0.30	
版本 (EDITION)	A	0.00 ± 0.20	
日期 (DATE)	2013 12 19	0.000 ± 0.10	

东莞市乔业电子有限公司
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	料号 (PART NO)	JVT2032HN0-XXXXL	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	031-2032-01	1/1	
核准 (APPROVE)		品名 (NAME)	PA 2.0mm 带扣 HSG		