

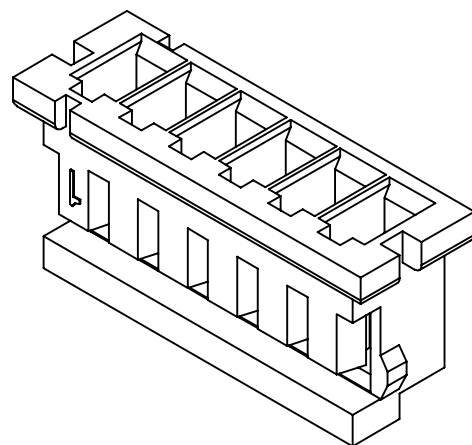
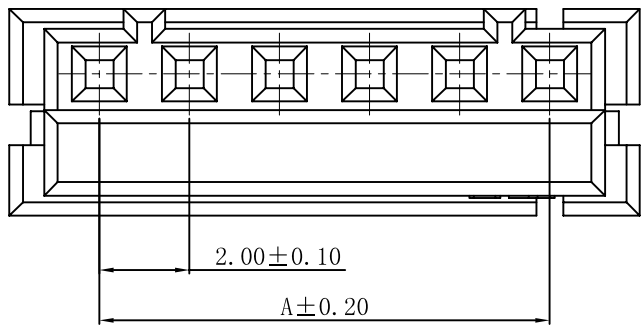


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

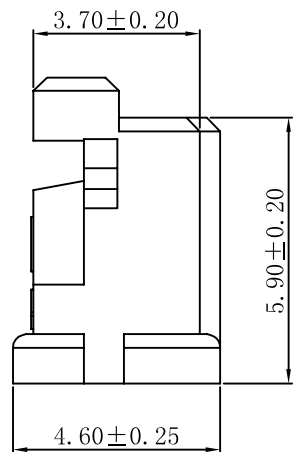

- SPECIFICATION
- Voltage rating: 250V AC, DC
  - Current Rating: 3A, AC, DC
  - Withstand voltage: 650V AC/minute
  - Contact resistance: 30mΩ max
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C
- HOUSING
- Material: PA66 UL94V-0 Black

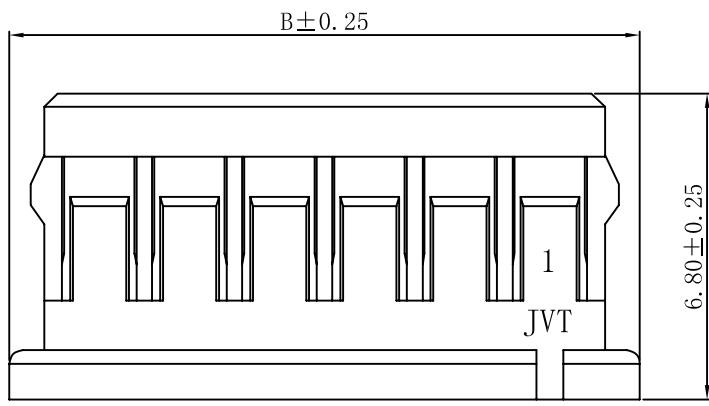

JVT2033HNO-XXBK

logo ————  
 系列码 ————  
 胶壳 ————

黑色 ————  
 PIN数 ————  
 PA66 UL94V-0

Poles	DIM(mm)		Poles	DIM(mm)	
	A	B		A	B
2	2.00	6.00	9	16.00	20.00
3	4.00	8.00	10	18.00	22.00
4	6.00	10.00	11	20.00	24.00
5	8.00	12.00	12	22.00	26.00
6	10.00	14.00	13	24.00	28.00
7	12.00	16.00	14	26.00	30.00
8	14.00	18.00	15	28.00	32.00

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0	±0.40
比例 (SCALE)	FIT	0.0	±0.30
版本 (EDITION)	A.0	0.00	±0.20
日期 (DATE)	2013 06 13	0.000	±0.05

**东莞市乔业电子有限公司**  
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品 号 (PART NO)	JVT2033HNO-XXBK	页 次 (PAGE)	
审核 (CHECKED)	CHEN	图 号 (DRAW NO)	031-2033-01		1/1
核准 (APPROVE)		品 名 (NAME)	DF3 2.0mm HSG		