
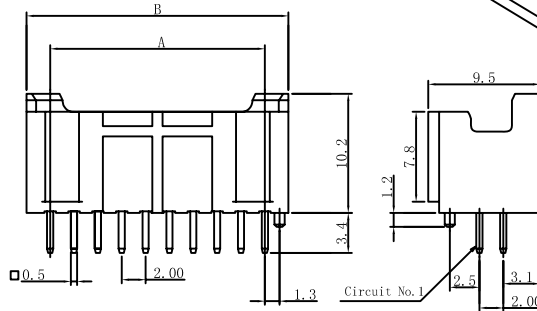
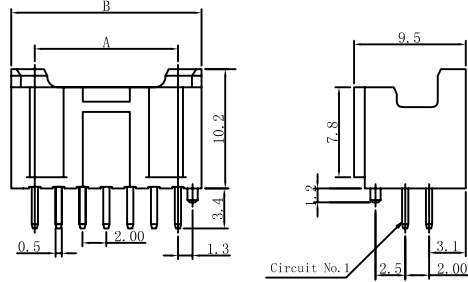


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

Top entry type (14 circuits or less)

(16 circuits or more)

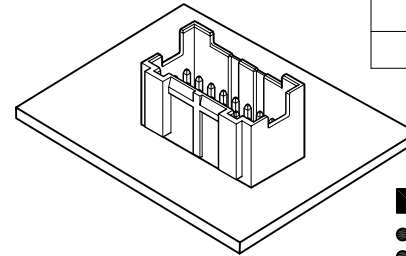


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 800V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C



■ WAFER

- Material: Base, Glass-filled PBT UL 94V-0, White Pin, Brass Tin-plated
- Q' TY: 500-1000PCS/bag

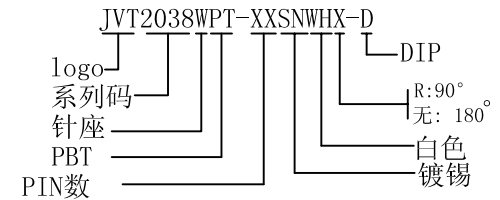

Side entry type (14 circuits or less)

(16 circuits or more)

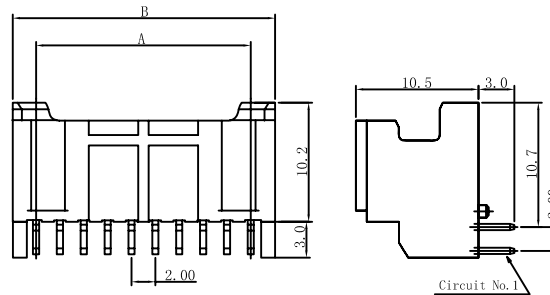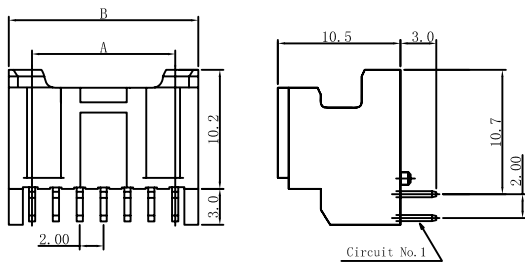

POLES	Dimensions (mm)		POLES	Dimensions (mm)	
	A	B		A	B
2*2	2.0	6.0	2*10	18.0	22.0
2*3	4.0	8.0	2*11	20.0	24.0
2*4	6.0	10.0	2*12	22.0	26.0
2*5	8.0	12.0	2*13	24.0	28.0
2*6	10.0	14.0	2*14	26.0	30.0
2*7	12.0	16.0	2*15	28.0	32.0
2*8	14.0	18.0	2*16	30.0	34.0
2*9	16.0	20.0			

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ± 0.50
比例 (SCALE)	FIT	0.0 ± 0.30
版本 (EDITION)	A	0.00 ± 0.20
日期 (DATE)	2013 11 22	0.000 ± 0.10

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	料号 (PART NO)	JVT2038WPT-XXSNWHX-D	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	031-2038-01	1/1	
核准 (APPROVE)		品名 (NAME)	PAD 2.0 WAFER DIP		