
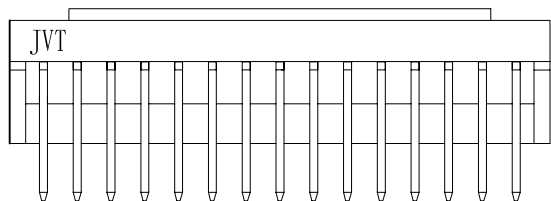
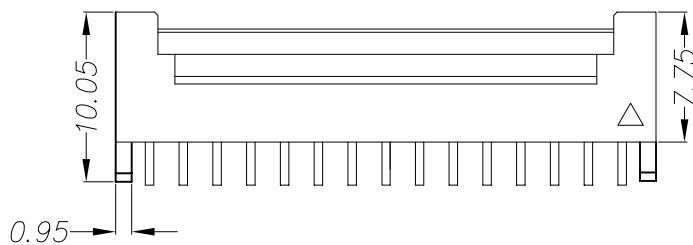

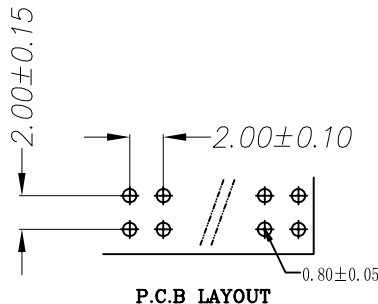


RoHS

REVISION DATE

| ITEM | DESCRIPTION | DATE |
|------|-------------|------|
| A | Issue | |

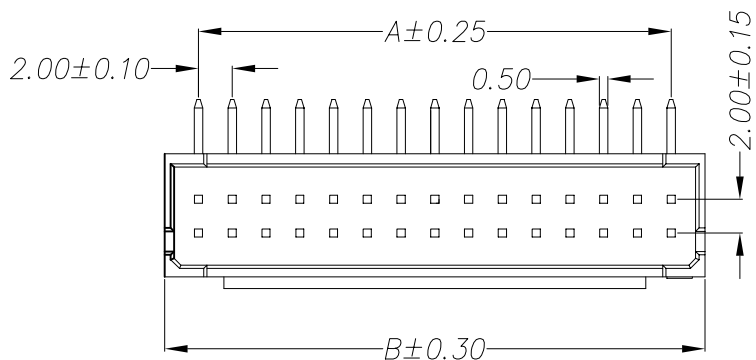


■ Specifications

- Voltage rating: 250V AC/ DC
- Current rating: 5A AC/ DC
- Withstanding Voltage: 1000V AC/minute.
- Insulation resistance: 1000MΩ Min.
- Temperature range: -25°C~+85°C
- Contact resistance: Initial Value/30mΩ Max.

■ Wafer

- Part No.: JVT2041W9T-XXSNR-D
- Poles : 04-50
- Material: Nylon 9T UL 94V-0
Pin: Brass/Tin-Plated
- Q'ty: 1,000 Pcs/Bag

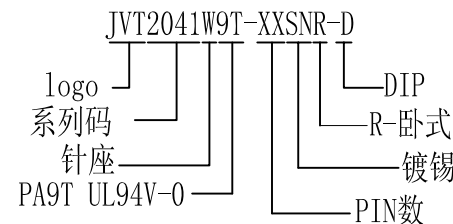

| PIN | "A" | "B" | PIN | "A" | "B" |
|-------|-------|-------|-------|-------|-------|
| 04PIN | 2.00 | 6.00 | 28PIN | 26.00 | 30.00 |
| 06PIN | 4.00 | 8.00 | 30PIN | 28.00 | 32.00 |
| 08PIN | 6.00 | 10.00 | 32PIN | 30.00 | 34.00 |
| 10PIN | 8.00 | 12.00 | 34PIN | 32.00 | 36.00 |
| 12PIN | 10.00 | 14.00 | 36PIN | 34.00 | 38.00 |
| 14PIN | 12.00 | 16.00 | 38PIN | 36.00 | 40.00 |
| 16PIN | 14.00 | 18.00 | 40PIN | 38.00 | 42.00 |
| 18PIN | 16.00 | 20.00 | 42PIN | 40.00 | 44.00 |
| 20PIN | 18.00 | 22.00 | 44PIN | 42.00 | 46.00 |
| 22PIN | 20.00 | 24.00 | 46PIN | 44.00 | 48.00 |
| 24PIN | 22.00 | 26.00 | 48PIN | 46.00 | 50.00 |
| 26PIN | 24.00 | 28.00 | 50PIN | 48.00 | 52.00 |

| 投影 (PROJECT) | | 公差 (TOLERANCE) | |
|--------------|------------|----------------|-------|
| 单位 (UNIT) | mm | 0 | ±0.50 |
| 比例 (SCALE) | FIT | 0.0 | ±0.30 |
| 版本 (EDITION) | A | 0.00 | ±0.20 |
| 日期 (DATE) | 2014 07 26 | 0.000 | ±0.10 |

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

| | | | | | |
|--------------|------|--------------|-------------------------|-----------|-----|
| 绘图 (DRAWN) | TONY | 料号 (PART NO) | JVT2041W9T-XXSNR-D | 页次 (PAGE) | |
| 审核 (CHECKED) | CHEN | 图号 (DRAW NO) | 031-2041-02 | | 1/1 |
| 核准 (APPROVE) | | 品名 (NAME) | PHB 2.0mm 90° WAFER DIP | | |